



4

3



2

1

D

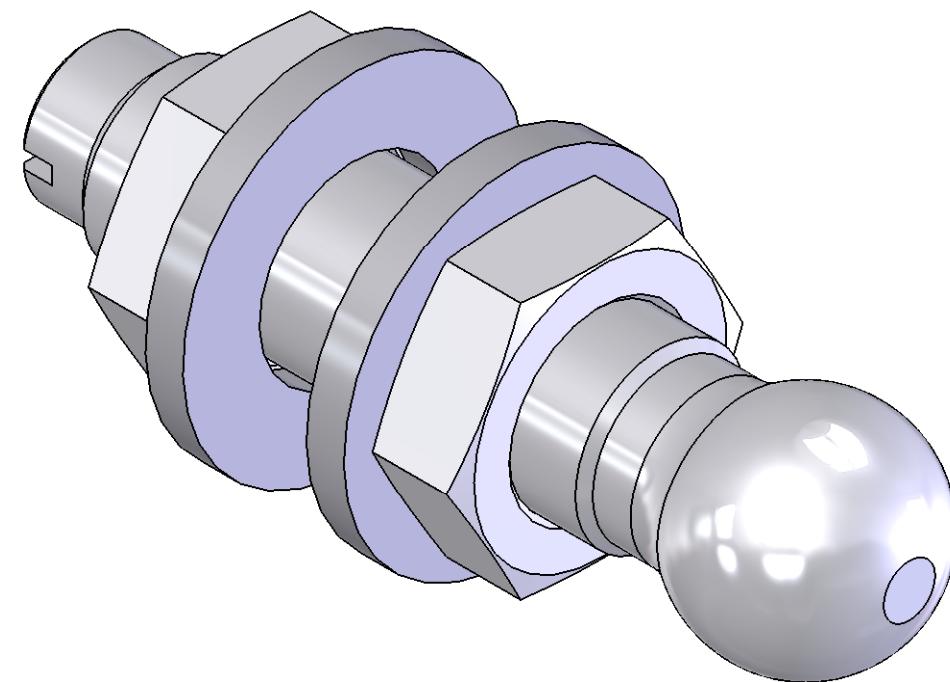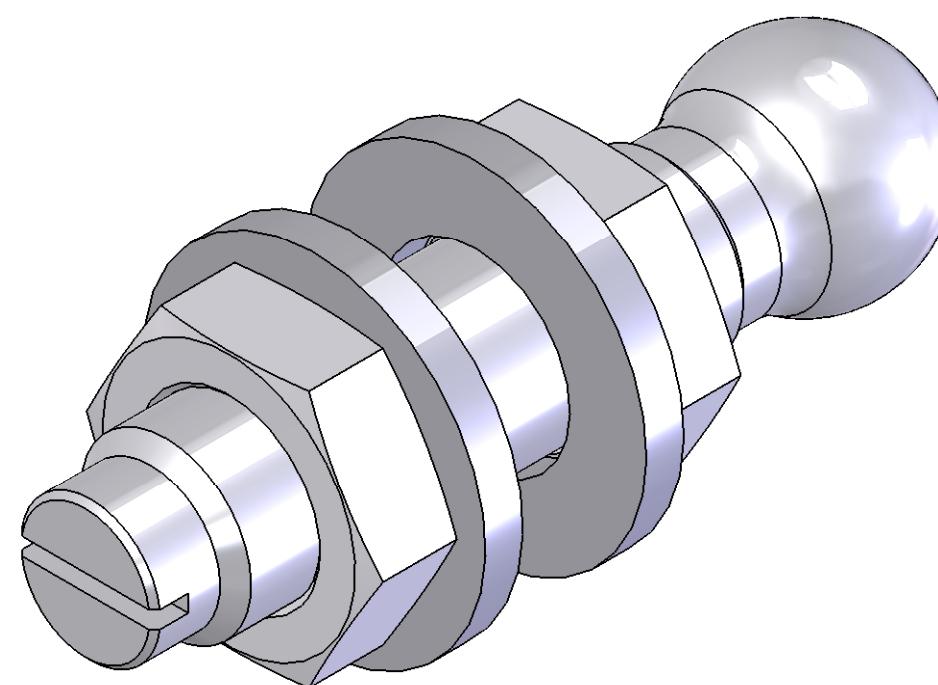

C

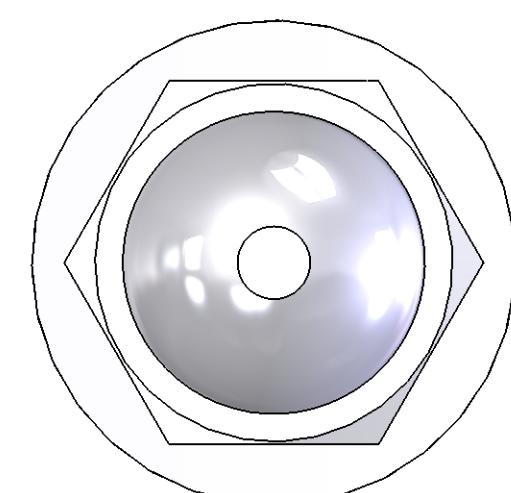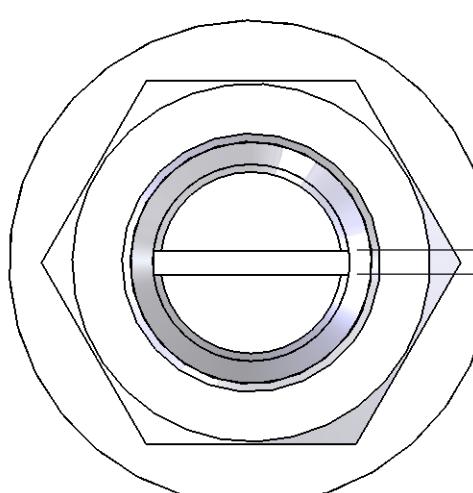


B

1.6

 $\phi 13.0$

M16 x .75 THREAD.
24 mm ACROSS FLATS
8.0 mm THICK

JAM NUT
8.0 mm THICK

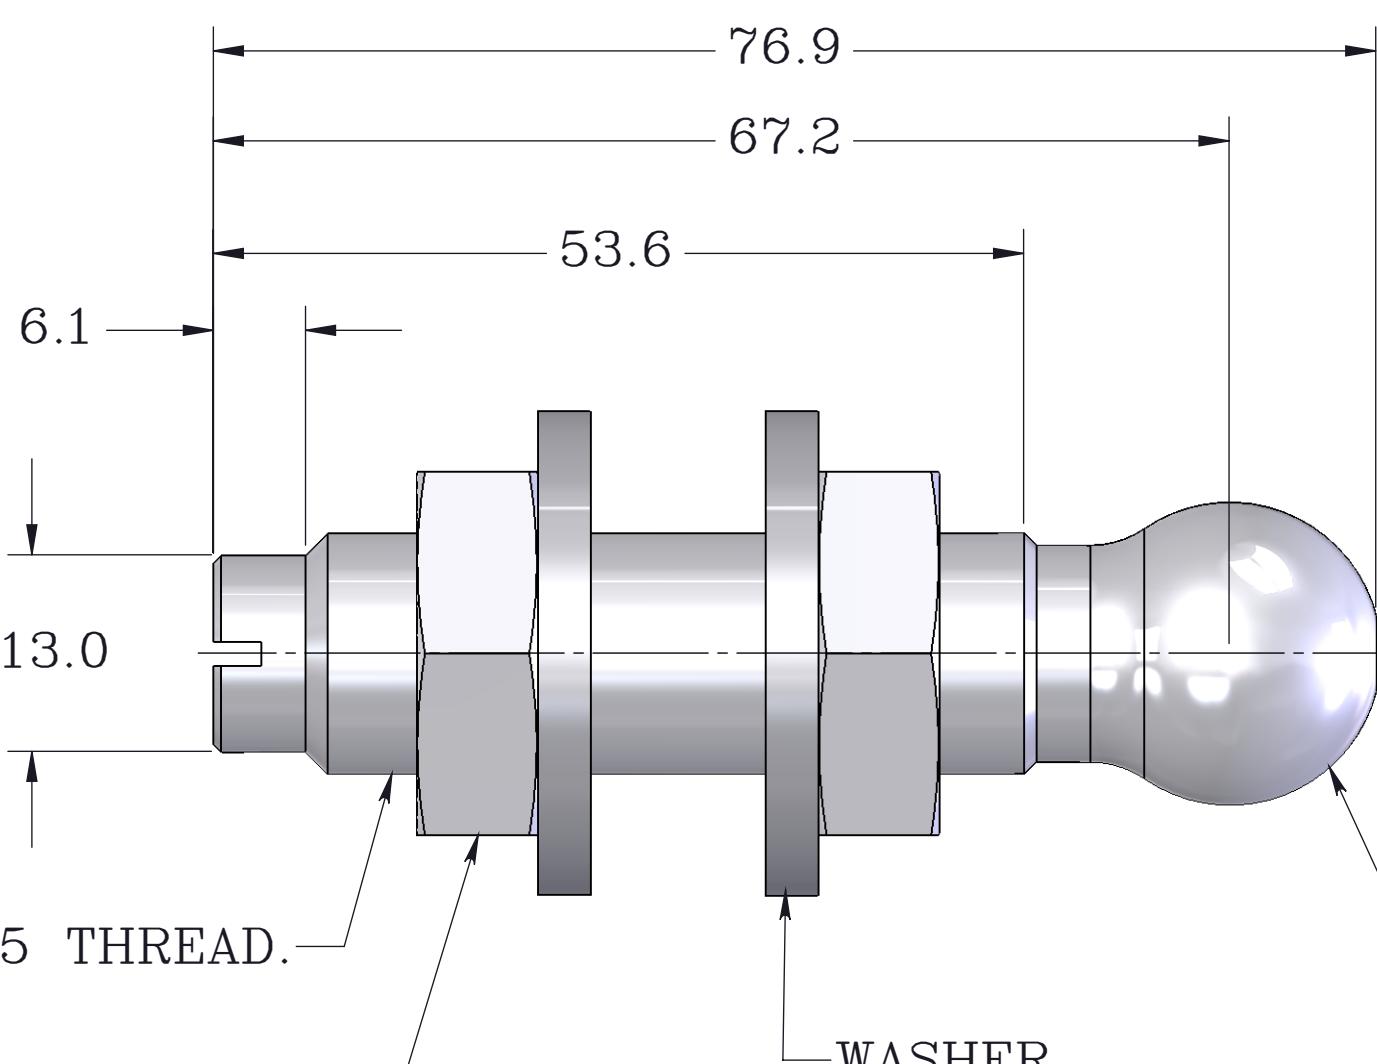

NOTES:

ALL DIMENSIONS ARE IN MILLIMETERS

PROPRIETARY ITEM:
THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO NEW WAY MACHINE COMPONENTS, INC. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DRAWING OR THE INFORMATION CONTAINED HEREIN IS EXPRESSLY PROHIBITED EXCEPT AS NEW WAY MAY OTHERWISE AGREE TO IN WRITING. ALL RIGHTS RESERVED BY NEW WAY MACHINE COMPONENTS, INC.

TOLERANCES UNLESS OTHERWISE SPECIFIED
ANGLES $\pm 1/2^\circ$
DECIMALS XX $\pm .254$ MM
DECIMALS XXX $\pm .127$ MM
SURFACE ROUGHNESS
1.6 $\sqrt{\text{RMS MAX.}}$
BREAK ALL SHARP EDGES
0.2-0.5 MM

TITLE: $\phi 20$ MM BALL MOUNT ASSEMBLY

DRAWN: GWS DATE: 1/20/05 MATERIAL:

CHECKED: DATE:

SCALE: 2 : 1 SHT. 1 OF 1 HEAT TREAT:

USED ON: FINISH:

NEWWAY
air bearings

DWG. NO. S8020B01

REV.

4

3

2

1